



#### Basic equipment configuration: Filler A4001-S



OP7

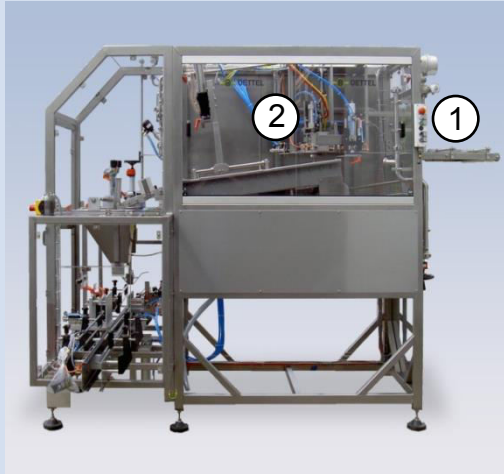

E-cabinet



Control cabinet



Pneumatic



IDM



CIP-adapter



Bag separation




Bag intake



Filling chamber

#### Basic equipment configuration: Bag loading station

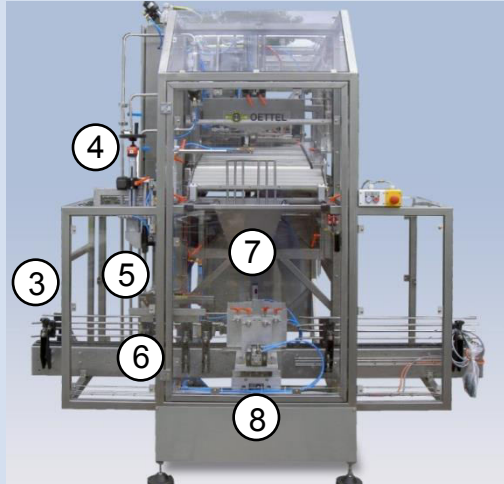

Conveyor belt (3)



Hand wheel (4)



Spreader (5)




Singularisation (6)



Bag funnel (7)



Lifting station (8)



Operating panel


#### Performance:

3 litre up to 720 bags/hour  
5 litre up to 600 bags/hour  
10 litre up to 480 bags/hour


#### Technical Data

Filling range: 3 ... 20 litres  
Compressed air pressure: 6 bar (Festo-components)  
Voltage/power: 400V (50Hz)/ 25A  
Control voltage: 24V

- Can be used to process nearly all liquids
- Robust stainless steel construction
- High-quality equipment components (Siemens, Festo, SEW)
- Good operability
- Maintenance friendly design allowing good accessibility
- Pre-settable program modes(CIP, forward running, production, maintenance)
- Exact machine set up via the hand wheel
- High operational availability through precise component processing
- Format change within just a few minutes
- Pre-programmed filling quantities via selection switch on operating box
- Remote maintenance via modem
- The machine conforms to EC Machinery Directive 2006/42/EC

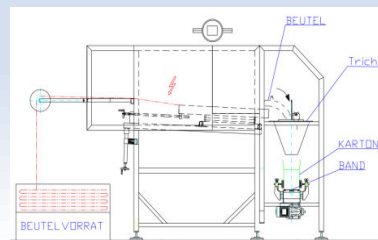

Dimensions L/B/H: 3800/2300/2300



Cartons for 3, 5, 10 und 20 litres

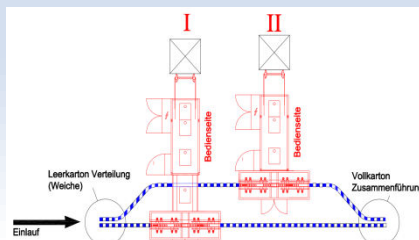


Illustration showing 2 filling machines



Standard sealing systems