


**Basic equipment configuration: Filler A4001**



OP7

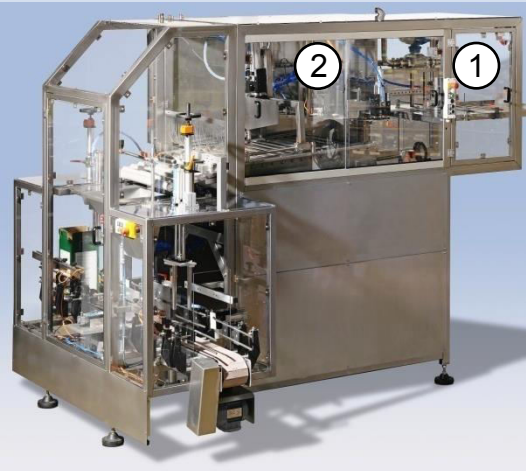

E-cabinet



Control cabinet



Pneumatic



IDM



CIP-adapter



Bag separation




Bag intake (1)



Filling chamber (2)

**Basic equipment configuration: Bag loading station**

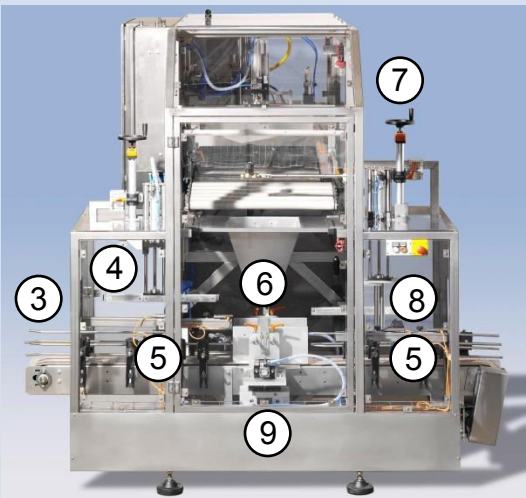

Coveyor belt (3)




Spreader (4)



Singularisation (5)



Bag funnel (6)



Operating panel



Hand wheel (7)



Tap positioner (8)



Lifting station (9)


**Performance:**

3 litre up to 960 bags/hour  
5 litre up to 840 bags/hour  
10 litre up to 540 bags/hour


**Technical Data**

Filling range: 3 ... 20 litres  
Compressed air pressure: 6 bar (Festo-components)  
Voltage/power: 400V (50Hz)/ 25A  
Control voltage: 24V

- Can be used to process nearly all liquids
- Robust stainless steel construction
- High-quality equipment components (Siemens, Festo, SEW)
- Good operability
- Maintenance friendly design allowing good accessibility
- Pre-settable program modes (CIP, forward running, production, maintenance)
- Exact machine settings via the hand wheel
- High operational availability through precise component processing
- Format change within just a few minutes
- Pre-programmed filling quantities via selection switch on operating box
- Remote maintenance via modem
- The machine conforms to EC Machinery Directive 2006/42/EC

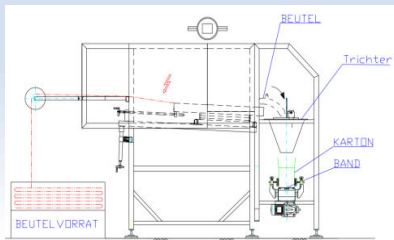

Dimensions L/B/H: 3800/2300/2300



Cartons for 3, 5, 10 und 20 litres

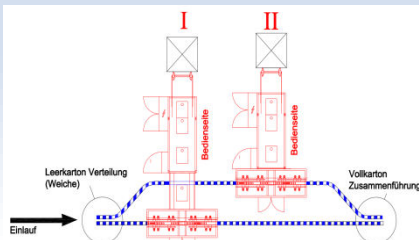


Illustration showing 2 filling machines



Standard sealing systems